



Minimalist dual lamp low-glare Emergency spotlight perfect for applications where conventional ceiling-mounted emergencies cannot be used.

Features

- High performance 2x2W LED spotlights
- Advanced Lithium batteries
- Surface mounted - wall
- Multimode operation, switchable
- High transmission acrylic lens
- Low energy consumption
- Large terminal blocks
- Designed in accordance with AS/NZS 2293


Ordering Information

Part Number	Description	Box Quantity
MRX-EM23F	GEMINI 2x2W LED Non-Maintained Emergency Floodlight c/w Lithium Battery	1

Specifications

Input	Wiring	Lamp	Mode	Battery	Autonomy	Mounting	IP	Compliance	Classification
230VAC 50Hz	Hardwired into terminal block	2x3W LED 5000K	Multimode, non-maintained, switchable	LiFePO4	> 120 mins	Wall, surface mount	IP20	RCM, AS/NZS 2293, AS/NZS 60598.1	Variable

Dimensions

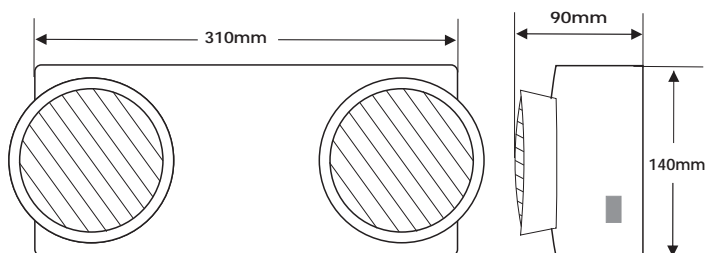

Length

310mm

Width

90mm

Height


140mm

Weight


2.0kg

Photometrics

The photometric data below is calculated at a mounting height of 3 metres. Lamps positioned as per the isoplots below:



1x2W head approx. 150m² of
emergency light @ 0.2 lux. min.



2x2W head approx. 270m² of
emergency light @ 0.2 lux. min.

According to AS/NZS 2293, emergency floodlights with rotatable light sources are classified as indirect emergency lighting. Therefore, emergency classifications and spacing tables are unavailable for this type of luminaire. IES files are available for specifiers.

Exclusive brand endorsed by:



Specifications are subject to change without prior notice due to ongoing improvement.

Ph: 1300 000 808

Email: sales@jinhang.com.au

www.jinhang.com.au