

Sleek, elegant and aesthetically-pleasing Exit Light for customer-facing, modern and sophisticated interior spaces.

### Features

- High performance LED technology
- Advanced Lithium batteries
- Maintained operation
- 24m viewing
- Recessed ceiling mounted
- 420mm x 75mm cut-out
- Complete with running man inserts
- Single or double sided
- Low energy consumption
- Complete with 1.2m flex and plug cable
- Designed in accordance with AS/NZS 2293




## Ordering Information

Part Number	Description	Box Quantity
MRX-EXRB	RBLADE LED Recessed 24m Maintained Blade Exit Light c/w Lithium Battery	10

## Specifications

Input	Wiring	Lamp	Mode	Viewing	Battery	Autonomy	Mounting	IP	Compliance	Classification
230VAC 50Hz	Complete with flex and plug	2W LED Strip 50,000 hours	Maintained	24m	LiFePO4	> 120 mins	Ceiling, recessed mount	IP20	RCM, AS/NZS 2293, AS/NZS 60598.1	C0 D6.3 C90 E3.2

## Dimensions

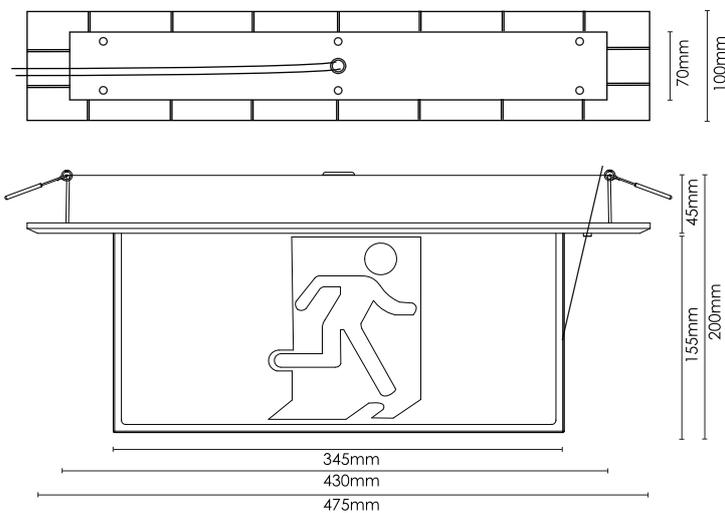

Length	Width	Height	Weight
475mm	100mm	200mm	1.5kg

## Spacing Table and Mounting Heights

NATA Classification	MOUNTING HEIGHT			
	2.1m	2.4m	2.7m	3.0m*
C0 - D6.3	8.6	8.8	9.0	9.1
C90 - E3.2	6.0	6.2	6.4	6.6

\* Maximum mounting height allowed is 2.7m but for exceptions see AS2293.1

Specifications are subject to change without prior notice due to ongoing improvement.

Exclusive brand endorsed by:

